


Endeavour Instrument Pvt. Ltd.

Manufacturers & Exporters of Electronic Weighing Scale & Weigh Bridges

Digital Crane Scale Model: OCS-SZL

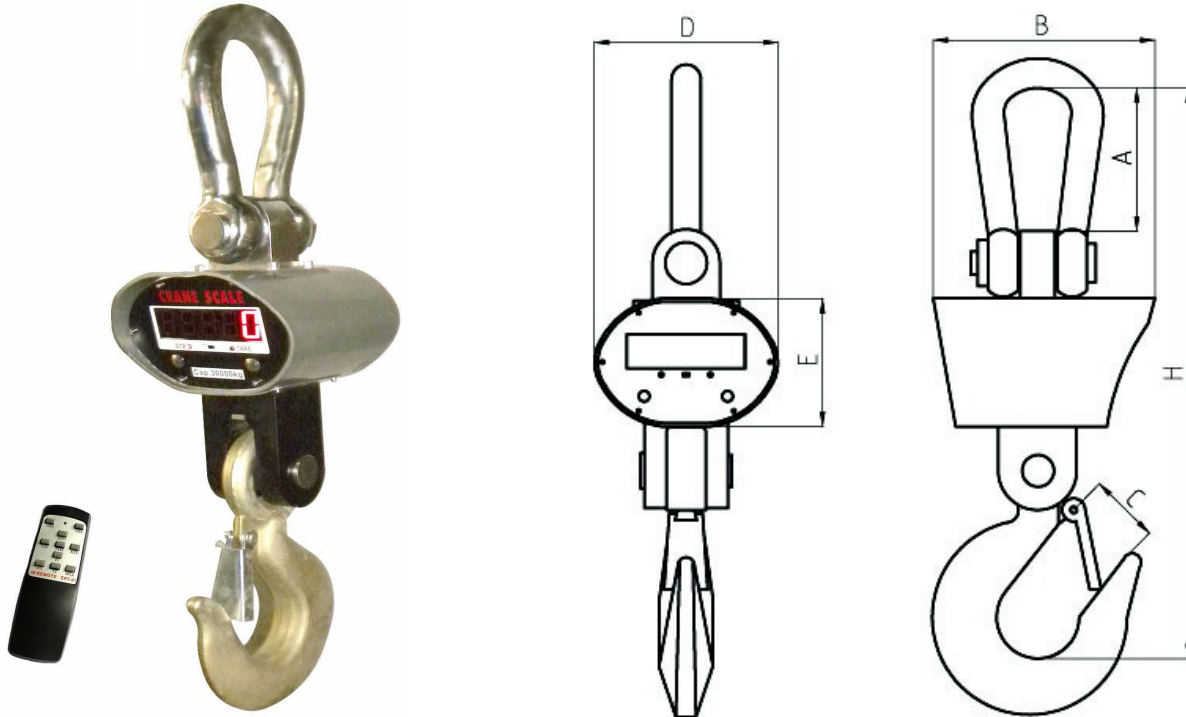

Dimensions and Specifications:

MODEL	Cap.(kg)	Resolution(kg)	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	H(mm)	N.W(kg)	G.W.(kg)
OCS-SZL-30	30000	10	260	340	100	300	200	1055	104	115

Features :

◆ Enclosure:

Seamless steel pipe extruded for maximum protection.

◆ Multi-weighing units:

Kg, lb are selectable, kg are default unit.

Multi-function operation:

Tare, Zero, Auto zero tracking, Total, Hold, Overload warning and record, operated through infrared remote controller.

User-friendly design:

Large red 5 digit LED display (digit height 45mm), Battery Operated with low battery indication, Auto turn off , power-saving function.

Gravity regulation:

The acceleration of gravity can be regulated through remote controller according to different places value.

Multi options:

RS-232-continuous or on demand data output, user-selectable.

Wireless big screen 3", 5", wireless indicator 180, 280, 380, 580 can match with the scale, user-selectable.



Endeavour Instrument Pvt. Ltd.

Manufacturers & Exporters of Electronic Weighing Scale & Weigh Bridges

Main technical data :

Accuracy Standard	According to OIML class III
Display	45mm (1.8") 5digits LED
Filtering	Low, Medium or High selectable
Units	Kilograms or Pounds selectable
Resulation	2000 to 3000 divisions standard(up to 15,000 available)
Zero Range	4% F.S.
Tare Range	100% F.S.
Overload Indication	100% F.S. + 9e
Max. Safety Load	125% F.S.
Ultimate Load	400% F.S.
Battery Type	Fully sealed Lead-Acid battery, 6V/7Ah
Battery Life	≥100 hours
Adapter	DC 9V/1000mA
Operating Humidity	≤85% RH under 20°C
Remote Controller Distance	Max. 15m
Battery of Remote Controller	7# battery, 1.5V x2
Acceleration of Gravity	Can be regulated, the default value is 9.793

E n d e a v o u r