



**ENDEAVOUR**

TOTAL WEIGHING SOLUTION

CML-3802758



IS-9281

## Endeavour Instrument Pvt. Ltd.

Manufacturers & Exporters of Electronic Weighing Scale & Weigh Bridges



### Features

#### Multi - weighing units:

Kg, lb, N are selectable, generally kg are default unit.

#### Multi - function operation:

Tare Zero Auto zero tracking Total Hold; Overload warning and record, operate through remote controller, etc functions.

#### User-friendly design:

Cast alluminium housing for maximum protection; Large red 5 digit LED display (digit height 58mm); Gravity compensation; Battery Operated with low battery indication; Automatic turn off , power-saving function.

### Main technical data

Standard	According to OIML class III
Display	58mm (2.3") 5digits LED
Zero Range	4% F.S.
Tare Range	100% F.S.
Stable Time	≤5 seconds
Overload Indication	100% F.S. + 9e
Max. Safety Load	125% F.S.
Ultimate Load	400% F.S.
Battery Life	≥80 hours
Battery Type	Fully sealed Lead-Acid battery, 6V/10Ah
Adapter	DC9V/1000mA
Operating Temp.	- 10 ~ + 40
Operating Humidity	≤85% RH under 20
Remote Controller Distance	Min. 15m
Battery of Remote Controller	7# battery, 1.5V2

Corp. Off. : 4th Floor, Mohini-II, Nr. Gandhigram Railway Station, Ashram Road, Ahmedabad-380 006, Gujarat, INDIA. Phone : +91-79-2658 2693-7 Fax : +91-79-26582107

Factory : 45/3, Changodar Industrial Estate, A'bad. Dist. Co-Op. Bank Road, Opp. S. T. Bus Stand, Sarkhej Bavla Highway, Changodar - 382 213. Ta. Sanand, Dist. : Ahmedabad, Gujarat, INDIA. Phone : +91-2717-250691 Fax : +91-2717-250475 Email: eipl@endeavourweigh.com, Web: www.endeavourweigh.com





**ENDEAVOUR**

TOTAL WEIGHING SOLUTION

CML-3802758



IS-9281


# Endeavour Instrument Pvt. Ltd.

Manufacturers & Exporters of Electronic Weighing Scale & Weigh Bridges

## Specification

MODEL	Max. capacity(kg)	Min. weigh(kg/)	Division(kg)	Total counts (n)
OCS-SZ-25t	25000	200	5Kg	2500
OCS-SZ-30t	30000	200	5Kg	3000
OCS-SZ-50t	50000	400	5Kg	2500

## Appearance illustration

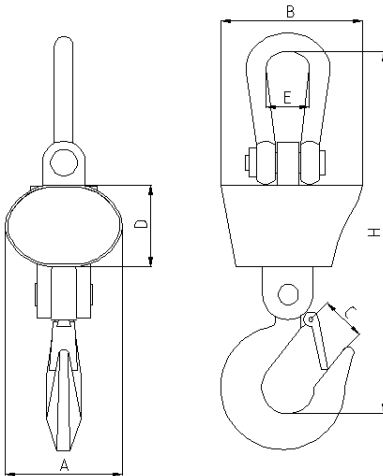

MODEL	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	H(mm)	NW	G.W.
OCS-SZ-25t	380	460	145	280	160	1150	165kg	185kg
OCS-SZ-30t	380	460	145	280	160	1150	165kg	185kg
OCS-SZ-50t	490	660	180	340	230	1700	480kg	560kg