



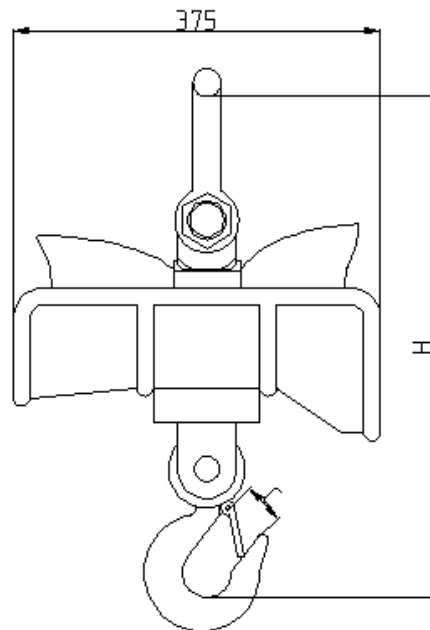

**Endeavour Instrument Pvt. Ltd.**  
 Manufacturers & Exporters of Electronic Weighing Scale & Weigh Bridges

**Heat Proof Digital Crane Scale**  
**Model: OCS-SH**

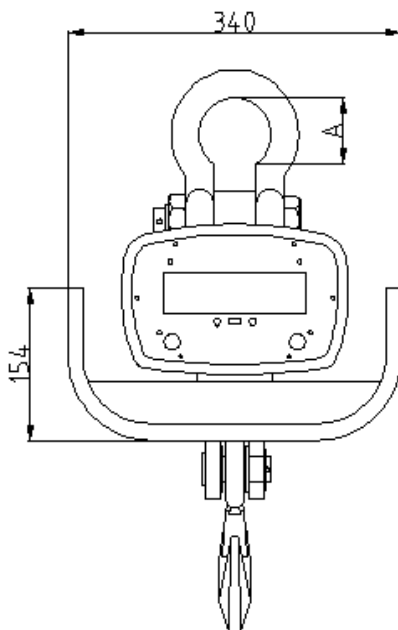

E n d e a v o u r





## Endeavour Instrument Pvt. Ltd.

Manufacturers & Exporters of Electronic Weighing Scale & Weigh Bridges

### Dimensions and Specifications:

MODEL	Cap.(kg)	Resolution(kg)	A(mm)	C(mm)	H(mm)	N.W(kg)	G.W.(kg)
OCS-SH-1	1000	100gm	100	40	600	24	27
OCS-SH-2	2000	200gm	100	40	600	24	27
OCS-SH-3	3000	500gm	130	45	720	33	36
OCS-SH-5	5000	1Kg	145	60	850	50	55
OCS-SH-10	10000	2Kg	170	85	900	75	78
OCS-SH-15	15000	5Kg	190	85	920	80	86

### Features :

#### ◆Enclosure:

NEMA 12/IP54 powder coated Foundry Cast Aluminum

#### ◆Multi-weighing units:

Kg, lb are selectable, kg are default unit.

##### 1. Multi-function operation:

Tare, Zero, Auto zero tracking, Total, Hold, Overload warning and record, operated through infrared remote controller.

##### 2. User-friendly design:

Large red 5 digit LED display (digit height 30mm), Battery Operated with low battery indication, Automatic turn off , power-saving function.

##### 3. Gravity regulation:

The acceleration of gravity can be regulated through remote controller according to different places value.



## Endeavour Instrument Pvt. Ltd.

Manufacturers & Exporters of Electronic Weighing Scale & Weigh Bridges

### Main technical data :

Accuracy Standard	According to OIML class III
Display	30mm (1.2") 5digits LCD/LED
Filtering	Low, Medium or High selectable
Units	Kilograms or Pounds selectable
Resolution	2000 to 3000 divisions standard(up to 15,000 available)
Zero Range	4% F.S.
Tare Range	100% F.S.
Overload Indication	100% F.S. + 9e
Max. Safety Load	125% F.S.
Ultimate Load	400% F.S.
Battery Type	Fully sealed Lead-Acid battery, 6V/7Ah
Battery Life	≥70 hours
Adapter	DC 9V/1000mA
Operating Humidity	≤85% RH under 20°C
Remote Controller Distance	Max. 15m
Battery of Remote Controller	7# battery, 1.5V x2
Acceleration of Gravity	Can be regulated, the default value is 9.793

### Min distance between scale and high temperature:

<b>1680°C</b>
<b>1.5m</b>

E n d e a v o u r

